

# ROOFING MASTER KIT

The Roof Master Kit is the complete kit for the Roofing Professional, including the Dec Scanner and the RWS Roof & Wall Scanner allowing for continuous and point-of-contact, non-destructive surveying of moisture conditions in roofing and waterproofing systems up to 152mm (6 inches) in depth. The kit also allows for non-destructive measurement of moisture conditions in concrete decks and pin readings in wood decks and roofing materials, relative humidity readings, and ambient and dew point conditions using the Tramex CMEX5 digital moisture meter and probes. An infrared surface thermometer gives surface temperature. This kit comes in a protective heavy-duty wheeled carry case with die-cut foam lining. The Roof Master Kit is used to perform ASTM D7954.



**TRAMEX METERS APP**  
FOR IOS & ANDROID DEVICES (PHONE NOT INCLUDED WITH KIT)

Product Code: RMK

## KIT CONTENTS

1. Dec Scanner.
2. RWS - Roof and Wall Scanner + telescopic handle (for use on roofs).
3. Concrete Moisture Encounter X5 - CMEX5.
4. App available for Android and iOS (phone not included).
5. Hand held electrode with 200mm (7.8") insulated pins.
6. 260mm (10") narrow RH probe.
7. Hole punch.
8. Infrared Thermometer.
9. Extension Handle for CMEX5.



NON-DESTRUCTIVE



COMPARATIVE  
READING RANGE  
0-100



AMBIENT  
RH, T, DP, g/kg



AMBIENT  
RH, T, DP, g/kg



WOOD %MC PIN  
READING RANGE  
5-30%



ASTM  
D7954



EXTENSION HANDLE

## DEC SCANNER - SPECIFICATIONS & MEASURING RANGE



The Tramex Dec Scanner is a mobile non-destructive impedance scanner designed for the instant surveying of moisture conditions in roofing and waterproofing systems per ASTM D7954.

Size:	762 mm x 400 mm x 158 mm (30" x 15 <sup>3</sup> / <sub>4</sub> " x 6 <sup>1</sup> / <sub>4</sub> ")	Depth of penetration:	152 mm (6")
Weight:	9.95 (Kg24.6 lbs)	Measuring Range:	0 to 100 Comparative
Construction:	ABS Body	Limitations:	
Power:	2 x 9 Volt PP3 Batteries (included)	Some EPDM, Butyl rubber roofing and other conductive roofing.	
Display:	Analogue		

## ROOF AND WALL SCANNER - RWS - SPECIFICATIONS & MEASURING RANGE



The Tramex RWS Roof and Wall Scanner is a multi-mode non-invasive impedance scanner designed for the instant, precise and non-destructive evaluation of moisture conditions and leak tracing in roofing per ASTM D7954 and in wall systems of the building envelope.

Size:	125mm x 275mm x 75mm (4.9" x 10.8" x 2.9")	Depth of penetration:	100mm (4")
Weight:	853g (1.88lbs)	Sensitivity:	
Construction:	ABS Body	Four Ranges:	
Power:	9 volt PP3 Battery (included)	Roofing Mode with high and low sensitivity.	
Display:	Analogue	EIFS / Foam Roof Insulation Mode with high and low sensitivity.	

# SPECIFICATIONS

## CONCRETE MOISTURE ENCOUNTER X5 - SPECIFICATIONS & MEASURING RANGE



The Tramex Concrete Moisture Encounter X5 is a non-destructive digital multi moisture meter for concrete decks providing instant and precise quantitative measurement of moisture content of concrete using Gravimetric testing as a baseline. The CMEX5 incorporates a built-in hygrometer and plug-in ports for the relative humidity probe and pin-type probe testing of roofing materials.

Free App Available for Mobile and Tablet:



Size:	180mm x 85mm x 40mm (7.1" x 3.4" x 1.6")	Moisture content for Concrete:	0 → 6.9 %
Weight:	357g (12.59oz)	Comparative for Gypsum floor screed:	0 → 12
Construction:	ABS Body	CM Equiv Anhydrite/Concrete:	0 → 2.7 / 0 → 4.3
Power:	2 x AALR6 ALKALINE (included)	Reference scale:	0 → 100
Display:	Digital	Relative Humidity :	0 → 99%
Depth of penetration in concrete:	approx. 20mm (3/4")	Humidity accuracy: 0% → 99%RH +/- 2% @ 25°C / 77°F	
		Moisture content for wood:	5 → 30 %
		(with optional wood pin probes)	

## INFRARED THERMOMETER - IRT2 - SPECIFICATIONS & MEASURING RANGE



The IRT2 is a handheld, dual laser, non-contact Infrared Thermometer with 12:1 distance to spot ratio and audible and visible high/low set point alarms. It is used to measure and display surface temperatures within the range of -50°C to 650°C (-58°F to 1202°F) and has an accuracy of approximately 1 to 1.5% (see Specifications for details). The IRT2 has a fast response time (0.15 sec) and is powered with a 9V battery and complies with Class II UK/EU laser safety standard EN60285.

Temperature range:	-50 to 650 °C (-58°F ~ 1202°F)
Distance to Spot ratio:	D:S = 12:1
Accuracy for targets assuming ambient operating temperature of 23 to 25 °C (73 to 77°F):	
	-50 ~ 20°C (-58°F ~ 68°F) ±2.5°C(4.5°F)
	20°C ~300°C (68°F ~572°F) ±1.0% ±1.0°C(1.8°F)
	300°C ~ 650°C (572°F ~ 1202°F) ±1.5%
Emissivity:	Digitally adjustable from 0.10 to 1.0
Power supply:	9V battery, NEDA 1604A or IEC 6LR61, or equivalent.

# SPECIFICATIONS


## KIT SPECIFICATIONS

Size: 1045mm x 535mm x 305mm (41.2" x 21.1" x 12")

Weight:

27kg (59.5lbs)

Power: 4 x 9 volt PP3 Batteries, 2 x AALR6 ALKALINE Batteries (included)

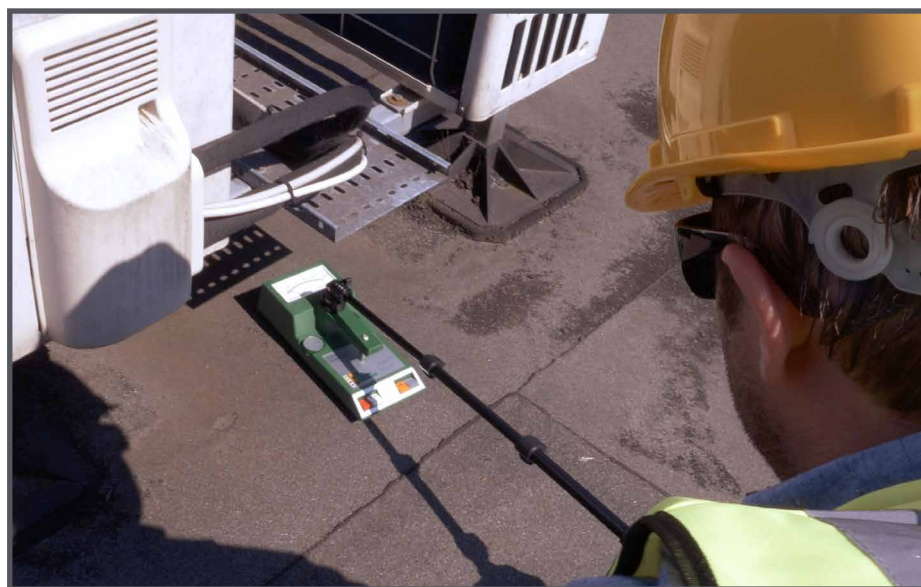

**Checkline Europe S.L. ®**  
Calle Real 85, Planta 2 B1  
29680 Estepona (Málaga)  
España

Tel: +34 951 870 125  
Web: <https://www.checkline.es>  
E-mail: [info@checkline.es](mailto:info@checkline.es)